

CITYBAC®

1100L DL



SULO®

Citybac® 1100L Dome Lid



PRODUCT DETAILS



- 1 Dome Lid
- 2 Handle / recessed grip
- 3 Lid handles lateral 2x
- 4 Finger guard
- 5 Marking areas
- 6 Lid opening pegs 2x
- 7 Lid hinge 2x
- 8 Push-buttons to close the domed lid

- A Body reinforced with beads
- B DIN comb lifting system, double stage
- C Stacking ribs
- D SULO sticker / Marking areas
- E Ergonomic handles lateral 4x
- F Chip nest as standard
- G Lifting trunnion
- H Functional castors 2x
- I Double stop break 2x
- J Castors 2x



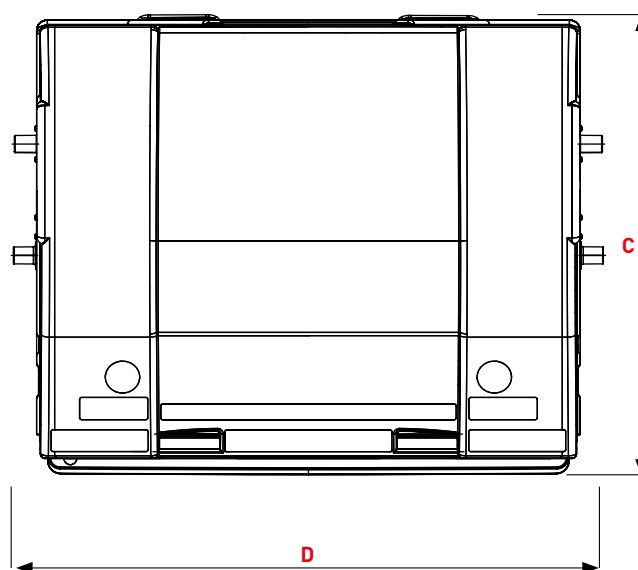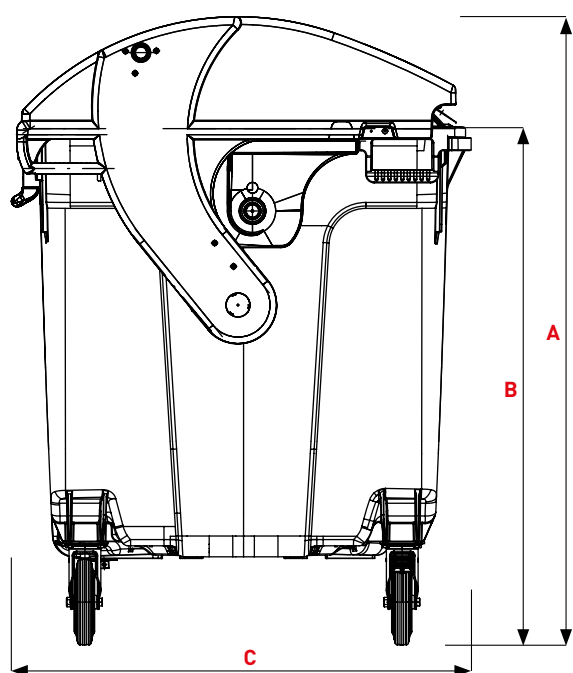

DOMELID

Dimensions (mm)

A Height total ~	1460
B Upper comb edge ~	1205
C Bin depth ~	1060
D Width total ~	1370

Weights

Nominal volume (L)	1100
Empty weight (kg) ~	54
Max. filling weight(kg) ~	440
Max. total weight (kg) ~	510

DOMELID WITH LID-IN-LID

Dimensions (mm)

A Height total ~	1460
B Upper comb edge ~	1205
C Bin depth ~	1060
D Width total ~	1370

Weights

Nominal volume (L)	1100
Empty weight (kg) ~	54
Max. filling weight(kg) ~	440
Max. total weight (kg) ~	510

Citybac® 1100L Dome Lid

PRODUCT DETAILS

COLOURING

Bin bodies made from 100 % recycled material with a minimum of 60 % post-consumer recycled material.



GREY
RAL 7021
AT
ECO FRIENDLY
■ ■ ■ ■ ■

Perfectly set in scene with coloured lids for fraction identification



GREY
RAL 7021
AT



GREEN
RAL 6011
VJ



BROWN
RAL 8025
MR



BLUE
RAL 5023
BN



YELLOW
RAL 1018
JA



ORANGE
RAL 2008
OF



RED
RAL 3000
RN

ALTERNATIVE COLOURS FOR THE BIN BODY



GREEN
RAL 6011
VJ

ECO FRIENDLY
■ ■ ■ ■ ■



BROWN
RAL 8025
MR

ECO FRIENDLY
■ ■ ■ ■ ■



BLUE
RAL 5023
BN

ECO FRIENDLY
■ ■ ■ ■ ■



YELLOW
RAL 1018
JA

ECO FRIENDLY
■ ■ ■ ■ ■

Colours may vary due to production. The colour values given according to RAL are guide colours.

+ OPTIONS

LID-IN-LID



front lid available in the colours



Lid-in-Lid

LID SLOT SYSTEMS

Glass



2x Round slot with rubber rosette
Ø 150 mm

Paper



Opening slot
530 x 95 mm



Paper Inlet Hood
BLUE

LIFTING SYSTEMS



Fork lift device



Lifting trunnions



Lateral handles 2x



Rear handles
2x

HANDLES

TRANSPORT



Towing system

LID OPENING




Lid opening device,
foot execution

NOISE REDUCTIONS SYSTEMS



Lid Opening Noise
Reduction



Lid closing damper

CHASSIS



Plastic rim,
Rubber wheel
Ø 200 mm



Plastic rim,
Rubber wheel
Ø 200 mm,
non-marking




Steel rim,
ball bearing,
Rubber wheel
Ø 200 mm



Double stop (DS)



Central locking
device (ZF)



Steering lock

LOCKING SYSTEMS



Triangular Locks



Padlock Fixtures



Cylinder lock with
automatic function



Cylinder lock without
automatic function

Citybac® 4-Wheel

TECHNICAL INFORMATION

1.100 LITRE DL

MATERIAL OPTIONS

Extra UV protection

■

COLOURS

Standard colours

■

Other colours

■

LID SYSTEMS

Flat lid

Flat lid with Lid-in-Lid (LiL)

Dome lid

■

Dome lid with Lid-in-Lid (LiL)

■

LIFTING SYSTEMS

EN 840 / DIN Comb

■

Lifting trunnions

■

Lifting handles 2x

■

Rear handles

■

Fork lift device

■

WATER DRAIN

Water drain

■

Without water drain

■

TRANSPORT

Towing system with or without bar

■

LID SLOT SYSTEMS

Glass

2 x Round slot with rubber rosette Ø 150 mm

■

Paper

Opening slot: 530 x 95 mm

■

Paper Inlet Hood Blue

■

LID OPENING

Lid opening device, foot execution

■

NOISE REDUCTIONS SYSTEMS

Lid opening noise reduction

■

Lid closing damper

■

CHILD SAFETY

Comfort

■

Basic

■

Light

■

CHASSIS

Plastic rim, Rubber wheel Ø 200 mm	■
Plastic rim, Rubber wheel Ø 200 mm, non-marking	■
Steel rim, ball bearing	■
Castor	■
Double stop (DS)	■
Central locking device (ZF)	■
Steering lock	■

LOCKING SYSTEMS

Padlock device 1x	
Padlock device 2x	■
Triangular Lock	
with open position	■
without open position	■
Cylinder lock without automatic function	
same key locking	■
group key locking	■
different key locking	■
Cylinder lock with automatic function	
same key locking	■
group key locking	■
different key locking	■

CHIP INSTALLATION

RFID chip, installation without barcode sticker	■
RFID chip, installation with barcode sticker	■

RFID CHIP

Transponder 134kHz HDX + HID Inlay casted	■
Transponder 134kHz FDX casted	■
Transponder 134kHz FDX riveted	■
Transponder 134kHz HDX + glass	■
Transponder 125kHz FDX casted	■
Transponder 125kHz FDX riveted	■
Transponder 13,56 MHz	■

LABELLING**Body**

SULO sticker	■
Customer sticker	■
Hot foil stamping	■
Running numbers (colourless / black / white)	■

Lid

SULO sticker	■
Screen printing	■
Hot foil stamping	■
Running numbers (colourless / black / white)	■
Embossing insert	■

- Standard
- Option

sulo.com

DATA-CITYBAC-1100L-DL-HF-EN-1-0-021221

SULO®